

SECTION 6

Code Description Size

XCESS CAMLOCK COMPATIBLE FULL FLOW TROUGH VALVE

Application: Large troughs high demand

Designed for fast fitting large troughs with its unique camlock compatible outlet. Suitable for all trough sizes where a convenient water supply is required.


- Very high flow rate for high demand
- Pressure range 0 – 1,200 kPa
- 500 l/min at 1200 kPa
- 25mm inlet
- 25/20mm blue adaptor included for 20mm inlet
- Camlock compatible (see below)
- Divergent nozzle for quiet operation
- No tools required for servicing
- Cord and nipple included
- Plunger is removable without removing arm
- Arm can be locked shut to stop flow - to clean troughs or to fit camlock
- Superior flow without the noise
- Float size 150mm
- Robust Acetyl Construction



**COLOUR CODE
RED**



Service in seconds
Without the need to
remove the arm. No
tools required!

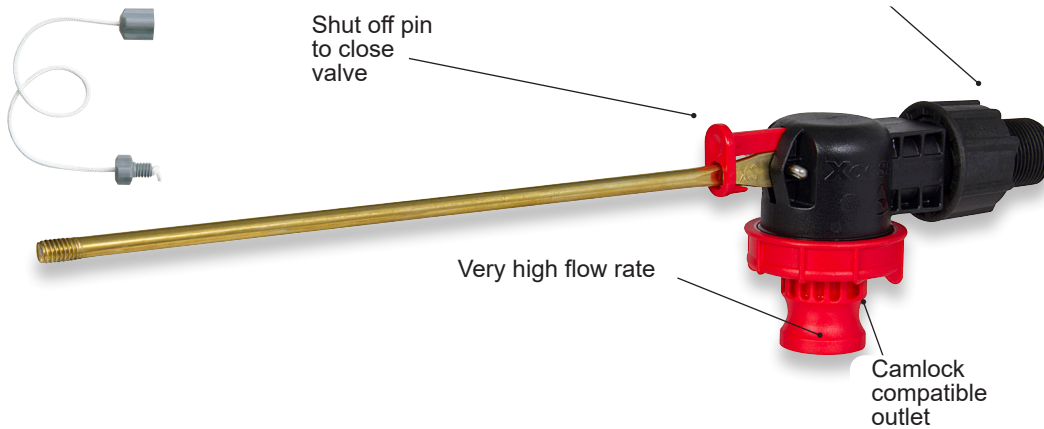

How to
install the
Camlock kit

AXS25/20	Xcess Standard	25/20mm
AXSLT25/20	Xcess Long Tail	25/20mm
AXS-KIT	Includes 20mm Camlock, 20mm ANKA male elbow, 20mm ANKA male straight coupling, 3 metres of UV resistant flexible hose	

XCESS SPARE PARTS

RKXS	Xcess Service Kit- Contains Plunger/o-ring, Seat Washer, Flow enhancing ring, Camlock Cap
SP80	Spare Arm

Unique Camlock compatible outlet allows for convenient water supply for many jobs around the farm

CAMLOCK KIT



Camlock Compatibility :
Top entry troughs or
minimum clearance from
trough to bottom 150mm



Portable troughs
for break (strip)
feeding systems



Sprinkler or small
irrigation system
NOTE: requires
280kPa/40psi



Wash down
equipment

Filling spray tank